



SR-20 RE-SEAL STATION


EASILY REPAIRS DE-LAMINATED, DAMAGED OR POORLY SEALED TAPE ON A FINISHED REEL

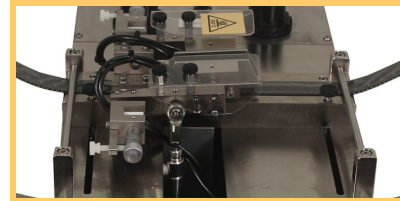

Heat seal process identical to that used on production scale tape/reel machines.

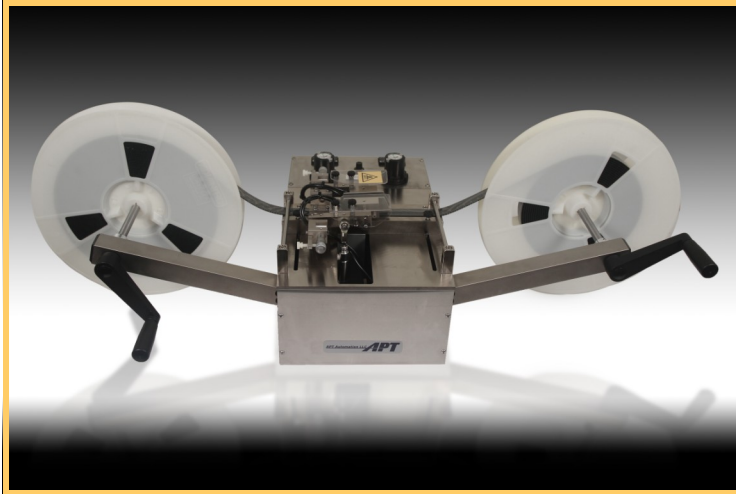

Dual temperature and pressure regulation. Switch selectable actuation of front, rear or both seal shoes

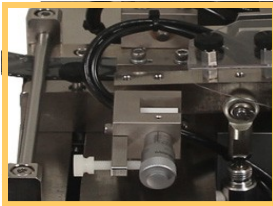

Micrometer adjustment of seal blade position assures re-seal alignment.



Tape is manually advanced. A foot switch actuates the seal blades.

SPECIFICATIONS

Reel Diameter: 7" -15" Standard
22" with optional arm extensions
Tape Type: Heat Sealable Plastic
Tape Width: 8 — 120 mm
Temp Control; Dual PID Controllers

Utilities: 115 - 240 VAC, 50/60 Hz
60—100 PSI Clean Air
ESD Protection:
Nickel Plated Tooling
Stainless Steel Shrouding
Footprint: 10" x 16" base, w/o arms

APT Automation LLC

APT

APT Automation LLC
New Berlin, WI USA 53151
www.aptautomation.com